



11/15/00

2. ☒ Specification
34 page(s) of specification; 3 page(s) of claims, 1 page(s) of abstract
3. ☒ Drawings
 Formal Figure(s) 1-5 on 5 sheet(s)
4. ☒ Oath or Declaration
☒ Newly executed
☐ Copy from a prior application (see 37 C.F.R. § 1.63(d))
 Deletion of Inventor(s) (in continuation or divisional applications)
☐ Delete the following inventor(s) named in the prior non-provisional application: _____
☐ The inventor(s) to be deleted are set forth on a signed sheet attached to this application.

5. ☐ The entire disclosure of the prior application referred to above is considered to be part of the accompanying application and is hereby incorporated by reference herein.
6. ☐ Microfiche Computer Program (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
- ☐ Computer Readable copy
- ☐ Paper Copy (identical to computer copy)
- ☐ Statement verifying identity of above copies
8. ☒ Assignment Papers
9. Power of Attorney
- ☒ Is attached.
- ☐ The power of attorney appears in the original papers of the prior application.
- ☐ Since the power does not appear in the original papers, a copy of the power in the prior application is enclosed.
10. ☐ Information Disclosure Statement (IDS)
- ☐ Copies of IDS Citations
11. Amendments
- ☐ A preliminary amendment is enclosed.
- ☐ Cancel in this application claim(s) _____ before calculating the filing fee. At least one independent claim is retained for filing purposes.
- ☐ Amend the specification by inserting before the first line the sentence:_____.
12. ☒ Return Receipt Postcard
13. Small Entity Status
- ☐ A small entity statement is enclosed.
- ☐ A small entity statement was filed in the prior non-provisional application and such status is still proper and desired.
- ☐ Is no longer claimed.
14. ☐ Priority of foreign application number _____, filed on _____ in _____ is claimed under 35 U.S.C. §§ 119(a)-(d)
15. ☐ Petition under 37 C.F.R. § 136 for Extension of Time
16. ☐ Other: _____

Address all future correspondence to:

Robert C. Kowert
Conley, Rose, & Tayon, P.C.
P.O. Box 398
Austin, Texas 78767
Phone: (512) 476-1400 Fax: (512) 703-1250

Signature

Name

Registration No.

Date

Robert C. Kowert

39,255

November 15, 2000

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Application No.: Unknown
Filed: Concurrently herewith
Inventor(s):
Stepan B. Sokolov

§ Examiner: Unknown
§ Group/Art Unit: Unknown
§ Atty. Dkt. No: 5181-60100
§
§
§
§
§
§
§
§
§
§


Title: Javascript Interpreter
Engine Written in Java

CERTIFICATE OF EXPRESS MAIL
UNDER 37 C.F.R. §1.10

"Express Mail" mailing label number: EL675025872US
DATE OF DEPOSIT: November 15, 2000

I hereby certify that this paper or fee is being deposited with the
United States Postal Service "Express Mail Post Office to
Addressee" service under 37 C.F.R. §1.10 on the date indicated
above and is addressed to:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231


Derrick Brown

FEE AUTHORIZATION


Assistant Commissioner for Patents
Washington, D.C. 20231

The Commissioner is hereby authorized to charge the following fee to Conley,
Rose & Tayon, P.C. Deposit Account Number 501505/5181-60100/RCK:

Fee: Filing Fee Amount: \$710.00 Attorney Docket No.: 5181-60100

The Commissioner is also authorized to charge any extension fee or other fees
which may be necessary to the same account number. If the abovementioned account is
found to have insufficient funds, the Commissioner is authorized to charge Conley, Rose
& Tayon, P.C. Deposit Account Number 501623/5181-60100/RCK.

Respectfully submitted,


Robert C. Kowert
Reg. No. 39,255

Conley, Rose & Tayon, P.C.
P.O. Box 398
Austin, TX 78767-0398
(512) 476-1400
Date: November 15, 2000

005111 " 64047260

PATENT
5181-60100
P4674

"EXPRESS MAIL" MAILING LABEL
NUMBER E6675025872US
DATE OF DEPOSIT 11-15-00
I HEREBY CERTIFY THAT THIS PAPER OR
FEE IS BEING DEPOSITED WITH THE
UNITED STATES POSTAL SERVICE
"EXPRESS MAIL POST OFFICE TO
ADDRESSEE" SERVICE UNDER 37 C.F.R. §
1.10 ON THE DATE INDICATED ABOVE
AND IS ADDRESSED TO THE ASSISTANT
COMMISSIONER FOR PATENTS,
WASHINGTON, D.C. 20231


Derrick Brown

JAVASCRIPT INTERPRETER ENGINE WRITTEN IN JAVA

by

Stepan B. Sokolov

Robert C. Kowert
Conley, Rose & Tayon, P.C.
P.O. Box 398
Austin, Texas 78767-0398
Phone: (512) 476-1400

00511 64047260

BACKGROUND OF THE INVENTION

1. Field of the Invention

5 This invention relates to a method and apparatus for interpreting and executing JavaScript programs, such as JavaScript programs embedded in hypertext markup language (“HTML”) documents. More particularly, embodiments of the present invention relate to a method and apparatus for a JavaScript interpreter written in Java. Specifically, a JavaScript interpreter may intercept JavaScript source code within HTML
10 documents, parse and convert the JavaScript source code to a proprietary intermediate form represented by objects written in Java. The JavaScript interpreter may interface with JavaScript library object to execute the intermediate representation equivalent of the original JavaScript source code.

15 2. Description of the Related Art

JavaScript is a Web scripting language developed by Netscape Communications Corporation. JavaScript was one of the first Web scripting languages and it remains one of the most popular today. JavaScript may be directly included in HTML documents.
20 HTML is a language used to create Web documents. Referring now to Figure 1, the JavaScript source code is typically embedded in HTML documents 110, by using a script tag, such as “<SCRIPT LANGUAGE=JavaScript>”. A Web browser 120, such as Netscape Navigator, executes HTML documents containing JavaScript source code. Unlike compiled languages, JavaScript is an interpreted language. This means the Web
25 browser executes each line of JavaScript as it comes to it. The ability to interpret and execute JavaScript source code has been provided in popular Web browsers, such as Netscape Navigator and Microsoft Internet Explorer. JavaScript programs run within a Web browser or other JavaScript-enabled applications to produce the desired results 130. The JavaScript language is regularly updated by Netscape. The most recent version of
30 JavaScript is version 1.3.

Typical prior art Web browsers that support JavaScript are programmed in native code compiled for a particular computer platform. However, it may be desirable to support JavaScript in a Web browser programmed in a platform-independent language such as Java. A Java-based Web browser may run on any computing platform under a Java Virtual Machine for the particular platform. However, Java-based programs typically execute more and may have a larger memory footprint than natively coded programs. Thus, adding JavaScript support to a Java-based browser may exacerbate speed and memory drawbacks. It may be desirable to overcome these drawbacks for a Java-based browser with JavaScript support, especially for use in embedded devices such as personal digital assistants (PDAs), wireless communication devices, such as cellular telephones, and other small consumer devices where computer processing speed and memory resources are at a premium. The present invention may provide a method and apparatus for interpreting and executing JavaScript source code embedded in HTML documents. The interpreter of the present invention may be written using the Java programming language. The present invention uses a smaller memory footprint than the prior art in interpreting and executing JavaScript programs. Furthermore, the architecture of the present invention may enable faster execution of JavaScript programs and enable the use of independent implementations of the interpreter, the Web browser and the JavaScript object library.

SUMMARY OF THE INVENTION

A method and apparatus for interpreting and executing a program is disclosed. Specifically, a method and apparatus is disclosed for accessing a program in memory,
5 parsing the program, generating an intermediate representation equivalent of the program, and executing the intermediate representation by accessing the program's library of host objects through an interface to the library.

In the preferred embodiment of the present invention, the program to be
10 interpreted and executed is a JavaScript program embedded in HTML documents in an Internet Web browser. The Web browser is programmed to intercept the JavaScript code and pass execution control over the program to the interpreter engine developed using the Java programming language. The parsing component of the engine validates the JavaScript instructions. The validated instructions are converted by the code generator
15 component of the engine into an intermediate representation equivalent in Java code. The interpreter engine accesses the program's library of host objects through an interface to the library and executes the intermediate representation to produce the desired results as programmed in the original JavaScript source program. The present invention further contemplates information media that conveys software for implementing the method
20 disclosed herein.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a flow diagram of a typical method of interpreting JavaScript programs;

5

Figure 2 is a flow diagram illustrating one embodiment of interception of JavaScript code in HTML for execution by a Java-based JavaScript interpreter;

Figure 3 is a flow diagram illustrating an embodiment of various components for interpreting JavaScript programs;

10

Figure 4 illustrates a method according to one embodiment for converting JavaScript code to an equivalent intermediate representation; and

Figure 5 illustrates the hierarchy of the JavaScript runtime objects and its relationship to the hierarchy of library objects, according to one embodiment.

15

While the invention is described herein by way of example for several embodiments and illustrative drawings, those skilled in the art will recognize that the invention is not limited to the embodiments or drawings described. It should be understood, that the drawings and detailed description thereto are not intended to limit the invention to the particular form disclosed, but on the contrary, the intention is to cover all modifications, equivalents and alternatives falling within the spirit and scope of the present invention as defined by the appended claims.

20
25

DETAILED DESCRIPTION OF EMBODIMENTS OF THE INVENTION

A preferred embodiment of the present invention may be developed using the Java programming language as provided in the Java Development Kit (JDK), version 1.1.7
5 from Sun Microsystems.

Referring now to Figure 2, in one embodiment, a JavaScript source program may be embedded in HTML 210. The HTML may be processed by a Web browser 220, such as Netscape Navigator or Microsoft Internet Explorer. A JavaScript tag in the HTML
10 may be used to identify the beginning of the JavaScript code section within the HTML. Upon encountering a JavaScript tag 230, the Web browser may pass execution control to an interpreter engine 250. The interpreter engine 250 may interpret the JavaScript code 210, execute it, and present the results to the user 260. Non-JavaScript code in the HTML may be executed by the Web browser 240.

The interpreter engine 250 is further illustrated in Figure 3, according to one embodiment. Once the Web browser has identified an input stream of JavaScript source code 310 in the HTML document, the Web browser may pass processing control to a parser component 320 of the interpreter engine. The parser 320 may examine the syntax
20 of the incoming JavaScript source code 310 to produce a validated listing of JavaScript code 330 before the code is translated by the interpreter. The parsed JavaScript code 330 may then be processed by a representation generator component 340 of the interpreter engine. The representation generator module 340 takes as input the validated JavaScript code 330 and produces an intermediate representation using a proprietary Java code equivalent 350 of the JavaScript code 310. The intermediate Java code representation
25 350 may then be interpreted by an interpreter component 360. The interpreter component 360 may use a library interface 370 to communicate with a JavaScript host objects library 380 to execute the intermediate representation 350 and produce desired results 390 as programmed in the original JavaScript source program 310.

As one of ordinary skill in the art will appreciate, there are various methods by which a Web browser may be enabled to recognize the parser component 320 as the appropriate subroutine to which the Web browser passes control upon encountering the JavaScript tag 230. One method is by placing "hooks" into the Web browser which
5 instructs the browser to call certain entry point methods of the parser component 320 when a JavaScript tag is encountered in the HTML code. The general method of placing such "hooks" in a Web browser by using the JDK Reflection API is well known to those of ordinary skill in the art. Other well-known methods of instructing one program to invoke another may be applied to instruct a Web browser to invoke the parser component
10 320. These methods include use of the "OnAction" keyword and "Form" tag.

In the preferred embodiment of the present invention, the parser component 320 may be written using Java CC, a publicly available utility published by Metamata. Using the Java CC utility, the parser component 320 may be written to accept the syntax
15 (grammar) of the input language to be parsed, i.e., the JavaScript syntax. This enables the parser component 320 to parse the input stream of JavaScript source code 310 to ensure that the correct syntax is followed. The parser component 320 produces a validated listing of JavaScript code 330. The parser 320 may create Java objects based on what is parsed from the input stream of the JavaScript source code 310. The Java objects, which
20 may contain field names and methods, may be stored using a technique such as hash tables. The use of hash tables may facilitate fast access of field names and methods during the entire process of interpreting and executing the JavaScript source code 310.

As stated above, a Java CC source file may define the JavaScript grammar in one
25 embodiment. The following illustrates the creation of Java CC source file definitions and three related parser methods as used in the preferred embodiment of the present invention:

```
PARSER_BEGIN(JvScParser)
30 class JvScParser
{
```

```

static JvScCodeGenerator codeGen; ...
boolean parseScript (int lineOffset) throws ParseException
{
    lineNumber = lineOffset;
5   if (Script ( ) )
    {
        if (codeGen.lastPut ( ) == JvScOperator.OP_STMTEND)
            codeGen.unput ( ) ;
            codeGen.put (JvScOperator.OP_EOF) ;
10        return true;
    }
    return false;
} ...
} ...
15 | < #LETTER: [ "A" - "Z", "a" - "z", "$" ] >
    | < #DIGIT: [ "0" - "9" ] >
    | < IDENTIFIER: <LETTER> (<LETTER> | <DIGIT> ) * > ...
boolean Script ( ) : { }
{
20     ( <SEMICOLON> ) * Statement ( ) ( <SEMICOLON> ) *
        ( Statement ( ) ( <SEMICOLON> ) * ) * <EOF>
        { return true; }

    | <EOF>
        { return false; }
25 }
/*
This is a handler for the JavaScript statement.
It delegates code-generating duties to other handlers depending on the current statement
type.
30 */
void Statement ( ) : { boolean nonEmpty; }
{
    nonEmpty = StatementBody ( )
        { if (nonEmpty)
35            codeGen.put (JvScOperator.OP_STMTEND) ;
        }

    | Block (null, false)
    | SwitchStatement ( )
40 | WhileStatement ( )
    | ForStatement ( )
    | DoStatement ( )
    | IfStatement ( )
    | FunctionDefinition ( )
45     { codeGen.put (JvScOperator.OP_STMTEND) ; }

```

```

|           GlobalVarDef ( )
} ...
/*

```

When a string of characters satisfying the pattern determined by <IDENTIFIER> (see above) has been encountered, it is used to create the JavaScript engine internal representation of identifiers, JvScName. 'token.image' is where the string is stored by the parser.

```

*/
JvScName Name ( ) : { }
{
    <IDENTIFIER>
    { return new JvScName (token.image) ; }
}

```

Once the parser 320 has parsed the input stream of the JavaScript program 310, the parsed JavaScript code 330 may be translated into an intermediate representation Java code 350 by the representation generator component 340. The intermediate format of the preferred embodiment may be an arbitrary scheme that is similar to Java byte code. As one skilled in the art will appreciate, the intermediate format may be any scheme that adequately represents the input JavaScript code 310 for execution by a JavaScript interpreter. The representation or intermediate format 350 of the preferred embodiment is particularly suitable for execution by a stack-machine implemented interpreter written in Java. However, as one skilled in the art will readily appreciate, it is not required that the intermediate format 350 be designed such that it may be executed by stack-machine implemented interpreter. Depending on the representation scheme used, alternatively designed interpreters may be used without departing from the present invention.

As stated above, the representation of the input JavaScript program 310 may be accomplished using many different schemes. The preferred embodiment of the present invention demonstrates one representation scheme using Java classes and objects. Referring now to Figure 4, a representation scheme example according to a preferred embodiment is illustrated. The input JavaScript source code sample 410 is "Echo("2+3:" + (2+));;" The JavaScript code 410 performs the simple function of adding two numbers and displaying the result. Box 420 shows a representation of the JavaScript code 410 as it is accomplished in the preferred embodiment. More particularly, box 430 lists logical

commands representing the JavaScript code 410, and box 440 lists Java objects and classes which correspond to the logical representations 430. Box 450 illustrates the foregoing with Java program code. The representation generator 340 may use a stack data structure to store the intermediate representation 350 as Java objects. For example, the JavaScript function "Echo" is represented with two pushes on the stack data structure. First, the logical command "call" is pushed on the stack to indicate the presence of a function or method. Second, the name of the function "echo" is pushed on the stack. The Java object "call" is an instance of the Java class JvScFunctionalCall. Similarly, the Java object "echo" is an instance of the Java class JvScName, used for storing host objects. The names of host objects may be names of methods or functions which are called to perform specific functions. And similarly, Java classes, such as JvScOperator, JvScString and JvScNumber may be created to hold Java objects, such as the operator "add," the string "2+3" and the integer "2" respectively. The parameters and commands in the intermediate representation may be Java objects.

Referring now to Figure 5, box 510 illustrates a hierarchy of the JavaScript runtime objects and its relationship to a hierarchy of library objects 580. The class JvScAtom 520 may generally consist of a JvScOperator class 530 and the JvScDatum class 540. The JvScOperator class 530 may contain objects such as "MUL," "ADD," "CALL," "GETFIELD" and "RETURN." The JvScDatum class 540 includes JvScName 550 (e.g., name of a method or function), JvScNumber 560 (e.g., the integer "2" used in an ADD operation) and JvScObject 570 (which is inserted in the stack data structure discussed above). As stated above, the representation generator 340 may use a stack data structure to store the intermediate representation 350 as Java objects.

The stack used in the representation scheme of the preferred embodiment may be an array of Java objects. Each element of this array (stack) may be either a command or a parameter. Each element may derive from an abstract Java class with very generic functionality and may contain data pertaining to the operator or data type it represents, sufficient for a stack machine interpreter to perform actions equivalent to those specified

in the original JavaScript program 310. The Java class to which an object in the array (stack) belongs, may determine whether the particular object is a command or a parameter. As one of ordinary skill in the art will appreciate, there are numerous methods of representing in memory the operators and the operands of a compiled program. In the preferred embodiment of the present invention, the logical representation 430 uses the well-known Polish notation scheme.

The intermediate representation 350 may have several advantages, such as a small memory footprint. Furthermore, the representation scheme of the preferred embodiment may enable faster execution of the JavaScript code 310 by the interpreter component 360.

The following illustrates the representation generator component 340 of the preferred embodiment and an associated representation scheme suitable for execution by a stack-machine implemented interpreter:

```

void ForStatement () : { }
    { <FOR> <LPAREN> ForRemainder () }
void ForRemainder () :
    { JvScScope scope = new JvScScope () ;
      JvScName n = null; }
    {
        LOOKAHEAD ( Name () <IN> ) n = Name() <IN> { scope.addLocal (n.name) ; }
        ForInRemainder (scope, n)
    |   LOOKAHEAD ( <VAR> Name () <IN> ) <VAR> n = Name () <IN>
    |       { scope.addLocal (n.name) ; } ForInRemainder (scope, n)
    |   [ ForInitList(scope) ] <SEMICOLON>
    |       TraditionalForRemainder(scope)
    }
void ForInitList (JvScScope scope) : { }
    {
        { /*codeGen.put (scope) ; */ scope = insideFunction; }
    (   Expression() { codeGen.put(JvScOperator.OP_STMTEND); }
        ( LOOKAHEAD(2) <COMMA> Expression()
          { codeGen.put (JvScOperator.OP_STMTEND); }
        ) *
        ( <COMMA> LocalVarStatement (scope) )?
    |   LocalVarStatement(scope)
    )

```

```

    }
    ...
    JvScAtom Literal() : { JvScArray a = null; }
    {
5      <INTEGER>
        {
            long num = 0;
            boolean tryDec = false;
            if (token.image.charAt(0) == '0' && token.image.length() > 1)
10         {
                if(Character.toUpperCase (
                    token.image.charAt (1)) == 'X')
                    num = Long.parseLong (
                        token.image.substring(2), 16) ;
15         else if(qualifyOctal (token.image)) {
                    num = Long.parseLong (
                        token.image.substring (1) , 8) ;
                }
                else {
20                 tryDec = true;
                    token.image = token.image.substring(1) ;
                }
            }
            else
25             tryDec = true;
            if (tryDec)
            {
                try {
                    num = Long.parseLong (token.image) ;
30                 }
                catch (NumberFormatException e) {
                    // Most probably the number was too long
                    return new JvScBigNumber(token.image);
                }
            }
35             return new CacheNumber (num);
        }
|      <FLOAT>
        { return new
40             CacheNumber ( (Double.valueOf (token.image)).
                DoubleValue () );
        }
|      <STRING>
        { return new CacheString (
45             token.image.substring (1, token.image.length () -1)); }

```

```

|     <TRUE>
|         { return JvScAtom.JvScTrue; }
|     <FALSE>
|         { return JvScAtom.JvScFalse; }
5 |     <NULL>
|         { return JvScAtom.JvScNull; }
|     <UNDEFINED>
|         { return JvScAtom.JvScUndefined; }
|
| }
10 ...
JvScOperator AssignOperator () : {}
{
|     <ASSIGN>                {return JvScOperator.OP_SET; }
|     <PLUS_ASSIGN>           {return JvScOperator.OP_ADD_SET; }
15 |     <MINUS_ASSIGN>          {return JvScOperator.OP_SUB_SET; }
|     <MUL_ASSIGN>            {return JvScOperator.OP_MUL_SET; }
|     <DIV_ASSIGN>            {return JvScOperator.OP_DIV_SET; }
|     <AND_ASSIGN>            {return JvScOperator.OP_AND_SET; }
|     <OR_ASSIGN>             {return JvScOperator.OP_OR_SET; }
20 |     <XOR_ASSIGN>            {return JvScOperator.OP_XOR_SET; }
|     <MOD_ASSIGN>            {return JvScOperator.OP_MOD_SET; }
|     <LSHIFT_ASSIGN>          {return JvScOperator.OP_LSH_SET; }
|     <RSHIFT_ASSIGN>          {return JvScOperator.OP_RSH_SET; }
|     <RUSHIFT_ASSIGN>         {return JvScOperator.OP_USH_SET; }
25 | }
...
public class JvScAtom implements Cloneable
{
    /* ECMAScript compatibility constants to be used by the typeof operator.
30    */
    static final String typeofUndefined    = "undefined";
    static final String typeofObject       = "object";
    static final String typeofNull         = typeofObject;
    static final String typeofBoolean      = "boolean";
35 static final String typeofFunction       = "function";
    static final String typeofNumber       = "number";
    static public final JvScAtom JvScTrue  = new JvScObject();
    static public final JvScAtom JvScFalse = new JvScObject();
    static public final JvScAtom JvScUndefined = new JvScObject();
40 static public final JvScAtom JvScNull    = new JvScObject();
    static public final JvScNumber JvScNaN  = new JvSCNumber(Double.NaN);
    static public final JvScAtom JvScLineNumber = new JvScAtom();
    public String typeOf()
    {
45         if (this == JvScNull)

```



```

        return typeofNull;
    else if (this == JvScUndefined)
        return typeofUndefined;
    else if (this == JvScTrue || this == JvScFalse)
5       return typeofBoolean;
    else if (this == JvScObject.NaN || this == JvScObject.Infinity)
        return typeofNumber;
    return typeofObject;
}
10 ...
public class JvScNumber extends JvScAtom
{
    static final String NAN_STRING           ="NaN";
    static final int MAX_RADIX               = 36;
15    static final String TYPEOF_NUMBER      = "number";
    static final String MAX_VALUE_STRING    = "1.7976931348623157e308";
    static final JvScNumber RADIX_10       = new JvScNumber(10);
    static final JvScNumber JvScZero       = new JvScNumber(0);
    static final JvScNumber JvScOne        = new JvScNumber(1);
20    boolean integer;
    double value;
    public JvScNumber(int value)
        { this.value = value; integer = true; }
    public JvScNumber(long value)
25        { this.value = value; integer = true; }
    public JvScNumber(float value)
        { this.value = value; integer = Math.floor(value) == value; }
    public JvScNumber(double value)
        { this.value = value; integer = Math.floor(value) == value; }
30    public JvScNumber(double value, boolean integer)
        { this.value = value; this.integer = integer; }
    public JvScNumber(Number value)
        { this(value.doubleValue()); }
    final public boolean isInteger() { return integer; }
35    final public void set(int value) { this.value = value; integer = true; }
    final public void set(long value) { this.value = value; integer = true; }
    final public void set(float value) { this.value = value; integer = false; }
    final public double get() { return value; }
    final public int intValue() { return (int)value; }
40    final public long longValue() { return (long)value; }
    final public float floatValue() { return (float)value; }
    public double doubleValue() { return value; }
    public JvScAtom toNumber() { return this; }
    public JvScAtom toBoolean()
45    {

```

```

        return value == 0.0 || Double.isNaN(value)?
            JvScFalse : JvScTrue;
    }
    public JvScAtom isFinite()
5      { return isFiniteboolean()? JvScTrue : JvScFalse; }
    public JvScAtom isNaN()
        { return Double.isNaN(value)? JvScTrue : JvScFalse; }
    boolean isNaNboolean()
        { return Double.isNaN(value); }
10   boolean isFiniteboolean()
    {
        return !Double.isNaN(value)
            && value < Float.MAX_VALUE
            && value > -Float.MAX_VALUE;
15   }
    static String trimSpaces(String str)
    {
        int i = 0;
        for ( ; i < str.length()
20          && (Character.isWhitespace(str.charAt(i))
            || str.charAt(i) == '\u000b');
            i++);
        return i > 0?
            (i >= str.length()? "" : str.substring(i)) :
25          str;
    }
    static long parseInt(String inStr, int radix)
    {
        int i = 0 ;
30      String numstr = trimSpaces(inStr);
        if(numstr.charAt (i) == '-'
            || numstr.charAt (i) == '+'
            || Character.digit(numstr.charAt(i), radix) >= 0)
        {
35          for ( ++i;
                i < numstr.length()
                && Character.digit(numstr.charAt(i), radix) >= 0;
                i++);
        }
40      return i < numstr.length()?
        Long.parseLong(numstr.substring(0,i), radix) :
        Long.parseLong(numstr, radix);
    }
    static double parseFloat(String numstr)
45   {

```

```

int i = 0 ;
boolean dot = false;
    if(numstr.charAt(i) == '-'
        || numstr.charAt(i) == '+'
        || Character.digit(numstr.charAt(i), 10) >= 0)
5      {
          for ( ++i;
              i < numstr.length()
              && ( Character.digit(numstr.charAt(i), 10) >= 0
              || numstr.charAt(i) == '.' && (dot = !dot));
              i++);
      }
    return Double.valueOf(
        i < numstr.length()? numstr.substring(0,i) : numstr).
15    doubleValue();
}
public Object toJavaType()
{
    if (integer)
20        return new Long((long)value);
    else
        return new Double(value);
}
public final String toString(JvScAtom radix) throws JavaScriptRuntimeException
25 {
    double r = radix.doubleValue();
    if(Double.isNaN(value) || this == JvScNaN)
        return NAN_STRING;
    if ((int)r != 10)
30    {
        if(Double.isNaN(r) || r <= 0 || r > MAX_RADIX)
            throw new JavaScriptRuntimeException (
                "Illegal radix: " + radix);
        return Long.toString(longValue(), (int)r);
35    }

    return value >= Float.MAX_VALUE?
        MAX_VALUE_STRING : (integer? ""+longValue() : ""+(float)value);
}
40 public String toString()
{
    try {
        return toString(RADIX_10);
    }
45    catch(JavaScriptRuntimeException e) {

```

```

        }
        return NAN_STRING;
    }

5   public String typeOf() { return TYPEOF_NUMBER; }
    }
    ...

    public class JvScObject extends JvScAtom
10  {
        static final String CLS_ARRAY = "Array";
        static final String CLS_OBJECT = "Object";
        static final String CLS_NUMBER = "Number";
        static final String CLS_STRING = "String";
15  static final String CLS_FUNCTION = "Function";
        static final String FLD_PROTOTYPE = "prototype";
        static final String FLD_CONSTRUCTOR = "constructor";
        static final String FLD_PROTO__ = "__proto__";
        static final String FLD_LENGTH = "length";
20  static final String FLD_TOSTRING = "toString";
        static final Class[] voidClsList = new Class[0];
        public static JvScAtom proto__ = new JvScObject();
        public static JvScAtom NaN = JvScAtom.JvScNaN;
        public static JvScAtom Infinity = new JvScObject();
25  private static Class STRING_CLASS = "".getClass();
        private static Class JVSCOBJECT_CLASS = proto__.getClass();
        static Class varParam[] ;
        static {
            varParam = new Class[1];
30  varParam[0] = (new JvScAtom[0]).getClass();
        }
        static Hashtable methods = new Hashtable();
        static Hashtable constructors = new Hashtable();
        static Hashtable staticInstances = new Hashtable();
35  // static Hashtable prototype = new Hashtable();
        protected Hashtable properties;
        static private String objectPrefix = "[object ";
        private static String toStringClassName(JvScObject object)
        {
40  String clsName = null;
            /*
                * This function is completely meaningless
                * if not for ECMA, wouldn't ever be written.
                */
45  if(object instanceof JvScPrototype)

```

```

        clsName = className(((JvScPrototype)object).getTargetClass());
    else if(object instanceof JvScNativeFunction)
        clsName = CLS_FUNCTION;
    else {
5         /* Object m = object.properties.get(FLDTOSTRING);

        if (m != null && m instanceof JvScNativeFunction
            && ((JvScNativeFunction)m).
                className.compareTo(CLS_OBJECT) == 0)
10         {
        }
        else try {
            if(object.getClass().getDeclaredMethod(FLD_TOSTRING,
                voidClsList) != null)
15                return object.toString();
        }
        catch(NoSuchMethodException e) {} */

        clsName = className(object.getClass());
20    }
    return objectPrefix + clsName + "];"
}
static final String className(Class cls)
{
25    String name = cls.getName();
    return name.substring(name.lastIndexOf(" ") + 1);
}
Public static JvScAtom fromJavaType(Object o)
{
30    if(o instanceof java.lang.String)
        return new JvScString((java.lang.String)o);
    else if(o instanceof java.lang.Number)
        return new JvScNumber((java.lang.Number)o);
    return new JavaObject(o);
35 }
static final JvScObject castToJvScObject(Object object)
{
    return (JvScObject)(object instanceof JvScObject?
        object : new JavaObject(object));
40 }
static JvScObject newInstance(Class cls, JvScAtom[] mem, int p1, int n)
    throws JavaScriptRuntimeException
    { return newInstance(cls, mem, p1, n, false); }
static JvScObject newInstance(Class cls, JvScAtom[] mem,
45 int p1, int n, boolean javaClass)

```

```

throws JavaScriptRuntimeError
{
    Constructor constructor[];
    JvScObject re = null;
5      if(n <= 0)
        {
            try {
                re = castToJvScObject(cls.newInstance());
            }
10         catch(Exception e) {
            throw new JavaScriptRuntimeError(
                "EXCEPTION trying to invoke constructor of " +
                cls + ": " + e);
            }
15     }
    else {
        int i = 0;

        if((constructor=(Constructor[])constructors.get(cls)) == null)
20             constructors.put(cls,
                constructor = cls.getConstructors());
        for( i = 0; i < constructor.length &&
            constructor[i].getParameterTypes().length != n; i++);
        if(i >= constructor.length)
25     {
        Constructor cnstr;
            /*
            * Try to find this(JvScAtom[] varp)
            */
30         try {
            cnstr = cls.getConstructor(varParam);
        }
        catch(Exception e) {
            throw new JavaScriptRuntimeError(
35                "There is no constructor of class " +
                className(cls) + "\' accepting " +
                n + " parameter(s) ");
        }
        re = newInstance(cnstr, mem, p1, n);
40     }
    else if (javaClass) {
        try {
            return newJavaInstance(
45                constructor[i], mem, p1, n);
        }
    }
}

```

```

        catch(Exception e) {
            throw new JavaScriptRuntimeException(
                "Exception caught trying
                instantiate "
                + cls + "\" ");
5
        }
    }
    else try {
        JvScAtom[] param = new JvScAtom[n];
        System.arraycopy(mem, p1, param, 0, n);
        re = (JvScObject)constructor[i].newInstance(param);
10
    }
    catch(Exception e) {
        throw new JavaScriptRuntimeException(
            "EXCEPTION trying to invoke constructor of "
            +
            "class " + className (cls) +
            "\" : "+e);
        }
20
    }
    JvScPrototype proto = null;
    try {
        proto =(JvScPrototype)getStaticInstance(cls.getName()).
            getField(FLD_PROTOTYPE);
25
    }
    catch(Exception e) {
        return re;
    }
    if (proto != null)
30
        initFieldsFromPrototype(re, proto);
    return re;
}
static private JvScObject newJavaInstance(Constructor c, JvScAtom[] mem,
    int p1, int n) throws JavaScriptRuntimeException
35
{
    try {
        return new JavaObject(
            c.newInstance(JavaObject.atomsToObjects(mem, p1, n)));
    }
    catch(Exception e) {
40
        throw new JavaScriptRuntimeException(
            "Exception in constructor " + c + ": " +
            (e instanceof InvocationTargetException?
            ((InvocationTargetException)e).
            getTargetException().toString() : e.toString()));
45
    }
}

```

```

        }
    }
    static private JvScObject newInstance(Constructor c, JvScAtom[] mem,
                                           int p1, int n) throws JavaScriptRuntimeException
5    {
        Object[] p = new Object[1];
        JvScAtom[] param = new JvScAtom[n];
        System.arraycopy(mem, p1, param, 0, n);
        p[0] = param;
10        try {
            return castToJvScObject(c.newInstance(p));
        }
        catch(Exception e) {
            throw new JavaScriptRuntimeException(
15                "Exception in constructor " + c + ": " +
                    (e instanceof InvocationTargetException?
                        ((InvocationTargetException)e).
                            getTargetException().toString() : e.toString() );
                )
20    }

    class JvScOperator extends JvScAtom
    {
        static final byte ARITHM = 1;
25        static final byte ASSIGN = 2;
        static final byte ACCESS = 3;
        static final byte LOGIC = 4;
        static final byte CONTRL = 5;
        static final byte INCDEC = 6;
30        static final JvScOperator OP_NOP = new JvScOperator(0, "<nop>");
        static final JvScOperator OP_EOF = new JvScOperator(0, "<stop>");
        // return
        static final JvScOperator OP_RET = new JvScOperator(0, "<ret>");
        // return, unload
35        static final JvScOperator OP_RETU = new JvScOperator(0, "<retu>");
        // return void
        static final JvScOperator OP_RETV = new JvScOperator(0, "<retv>");
        // return void, unload
        static final JvScOperator OP_RETVU = new JvScOperator(0, "<retvu>");
40        // function definition
        static final JvScOperator OP_DEFUN = new JvScOperator(0, "<defun>");
        static final JvScOperator OP_BLKEND = new JvScOperator(0, "} <end>");
        static final JvScOperator OP_UNLOAD = new JvScOperator(0, "} <end-unload>");
        static final JvScOperator OP_POP = new JvScOperator(0, "<pop>");
45        static final JvScOperator OP_STMTEND = OP_POP;
    }

```



```

static final JvScOperator OP_UNWITH = new JvScOperator(0, "<senza>");
static final JvScOperator OP_WITH = new JvScOperator(1, "<con>");
static final JvScOperator OP_TYPEOF = new JvScOperator(1, "<typeof>");
static final JvScOperator OP_DELETE = new JvScOperator(1, "<delete>");
5 static final JvScOperator OP_VOID = new JvScOperator(1, "<void>");
// It's a special get-indices method used primarily
// by the for(x in y) statement.
static final JvScOperator OP_GET_INDX = new JvScOperator(1, "<indices>");
static final JvScOperator OP_MINUS = new JvScOperator(1, "u-");
10 static final JvScOperator OP_PLUS = new JvScOperator(1, "u+");
static final JvScOperator OP_NEG = new JvScOperator(1, "~");
static final JvScOperator OP_NOT = new JvScOperator(1, "!");
static final JvScOperator OP_INCP = new JvScOperator(1, ".++", INCDEC);
static final JvScOperator OP_DECP = new JvScOperator(1, "--", INCDEC);
15 static final JvScOperator OP_INC = new JvScOperator(1, "++", INCDEC);
static final JvScOperator OP_DEC = new JvScOperator(1, "--", INCDEC);
static final JvScOperator OP_DIV = new JvScOperator(2, "/", ARITHM);
static final JvScOperator OP_MUL = new JvScOperator(2, "*", ARITHM);
static final JvScOperator OP_MOD = new JvScOperator(2, "%", ARITHM);
20 static final JvScOperator OP_ADD = new JvScOperator(2, "+", ARITHM);
static final JvScOperator OP_SUB = new JvScOperator(2, "-", ARITHM);
static final JvScOperator OP_RSH = new JvScOperator(2, ">>", ARITHM);
static final JvScOperator OP_LSH = new JvScOperator(2, "<<", ARITHM);
static final JvScOperator OP_USH = new JvScOperator(2, ">>>", ARITHM);
25 static final JvScOperator OP_BIT_OR = new JvScOperator(2, "|", ARITHM);
static final JvScOperator OP_BIT_XOR = new JvScOperator(2, "^", ARITHM);
static final JvScOperator OP_BIT_AND = new JvScOperator(2, "&", ARITHM);
static final JvScOperator OP_GT = new JvScOperator(2, ">", LOGIC);
static final JvScOperator OP_LT = new JvScOperator(2, "<", LOGIC);
30 static final JvScOperator OP_GE = new JvScOperator(2, ">=", LOGIC);
static final JvScOperator OP_LE = new JvScOperator(2, "<=", LOGIC);
static final JvScOperator OP_EQ = new JvScOperator(2, "==", LOGIC);
static final JvScOperator OP_NE = new JvScOperator(2, "!=", LOGIC);
static final JvScOperator OP_SET = new JvScOperator(2, "=", ASSIGN);
35 static final JvScOperator OP_ADD_SET = new JvScOperator(2, "+=", ASSIGN);
static final JvScOperator OP_SUB_SET = new JvScOperator(2, "-=", ASSIGN);
static final JvScOperator OP_MUL_SET = new JvScOperator(2, "*=", ASSIGN);
static final JvScOperator OP_DIV_SET = new JvScOperator(2, "/=", ASSIGN);
static final JvScOperator OP_MOD_SET = new JvScOperator(2, "%=", ASSIGN);
40 static final JvScOperator OP_AND_SET = new JvScOperator(2, "&=", ASSIGN);
static final JvScOperator OP_XOR_SET = new JvScOperator(2, "^=", ASSIGN);
static final JvScOperator OP_OR_SET = new JvScOperator(2, "|=", ASSIGN);
static final JvScOperator OP_RSH_SET = new JvScOperator(2, ">>=", ASSIGN);
static final JvScOperator OP_LSH_SET = new JvScOperator(2, "<<=", ASSIGN);
45 static final JvScOperator OP_USH_SET = new JvScOperator(2, ">>>=", ASSIGN);

```

```

/* Access Operations */
static final JvScOperator OP_ACS_ARR = new JvScOperator(2, "[]", ACCESS);
static final JvScOperator OPACS_OBJ = new JvScOperator(2, "->", ACCESS);
static final JvScOperator OP_FUN_CALL = new JvScOperator(-1, "<call>");
5 static final JvScOperator OP_NEW = new JvScOperator(-1, "<new>");
byte opArity;
byte type;
String opSign;
JvScOperator(byte opArity, String opSign)
10 { this.opArity = opArity; this.opSign = opsign; }
JvScOperator(int opArity, String opSign)
{ this(opArity, opsign, CONTRL); }
JvScOperator(int opArity, String opSign, byte type)
{ this((byte)opArity, opSign); this.type = type; }
15 public String toString()
{ return opSign; }
}
if (image == null)
image = new StringBuffer(new String(input_stream.GetSuffix(jjimageLe
20 n + (lengthOfMatch = jjmatchedPos + 1))));
else
image.append(new String(input_stream.GetSuffix(jjimageLen + (lengthOfMatch =
jjmatchedPos + 1))));
++JvScParser.lineNumber;
25 break;
default :
break;
}
}
30 }

```

Once the representation generator 340 has translated the parsed JavaScript code 330 to produce the intermediate representation 350, the interpreter component 360 may use the library interface 370 to communicate with the JavaScript host objects library 380 to execute the intermediate representation 350 and produce the desired results 390, as programmed in the original JavaScript source program 310.

The interpreter 360 may pop elements off the stack, executes them and places the result back on the stack. The interpreter may execute streams of Java objects (e.g., "push" and "2+3") in the stack containing commands and parameters belonging to

various Java classes (e.g., JvScOperator or JvScString). The interpreter may pop one or more elements off the stack depending on what instruction is being executed. For example, if an “ADD” operator is encountered, then the interpreter knows that it must pop two more elements which will form the operands for the “ADD” operation. The following illustrates the execution of the intermediate representation Java code 350 by the interpreter 360, according to one embodiment:

```

public class StackMachine
{
10  ...
    private JvScAtom executeScript (JvScAtom[] word,
        int start, JvScBrowserContext bc)
        throws JavaScriptRuntimeException
    {
15      if (bc != null)
        initContext(browserContext = bc);
        ...
        for ( pc = start; ; pc++)
        {
20          if ( (w=word[pc] ) instanceof JvScOperator)
          {
            ...
            case JvScOperator.ARITHM : arithmetic(w, n, n2) ; break;
            ...
25          }
          else
            stack [++sp] = w;
        }
    }
30  private JvScAtom arithmetic (JvScAtom w, JvScNumber n, JvScNumber n2)
    throws JavaScriptRuntimeException
    {
        if (w == JvScOperator.OP_ADD || w == JvScOperator.OP_ADD_SET)
            shadowNumber [sp - 1] . value = n.value + n2.value;
35      if (w == JvScOperator.OP_SUB || w == JvScOperator.OP_SUB_SET)
            shadowNumber [sp - 1] . value = n.value - n2.value;
        // etc., ...
        return stack [sp - 1] = shadowNumber [sp - 1] ;
    }
40

```

Referring to Figure 3, the interpreter component 360 may use the library interface 370 to communicate with the JavaScript host objects library 380 to execute the intermediate representation 350. In a JavaScript program execution environment, there may be several functionally independent components. The JavaScript interpreter and the JavaScript library are two of the most important components. In a preferred embodiment, the JavaScript program execution environment may be implemented using the Java programming language. The preferred embodiment may provide a mechanism whereby host objects in a JavaScript library are accessible to the interpreter in an execution environment designed in Java.

10

The method and system of the preferred embodiment may provide an interface 370 between the JavaScript interpreter 360 and the JavaScript library objects 380, where both the interpreter 360 and the library objects 380 are written in Java. The interface 370 enables the implementation of the interpreter 360 to be independent of the implementation of the library objects 380. Furthermore, the implementation of the interpreter 360 may be independent of the HTML browser 220 in which it runs. The foregoing relationship between the interpreter, the library objects and the browser may make it possible to easily incorporate the interpreter in any Java-enabled browser with an arbitrary library objects implementation.

20

Still referring to Figure 3, the library objects 380 may be derived from abstract Java classes. The interpreter 360 may use the JDK Reflection API for at least two purposes. First, the Reflection API may enable the interpreter 360 to access specific information (such as properties) about known objects and classes in the library 380. Such information may include, for example, the availability of particular fields and methods within objects. Second, the Reflection API may enable the interpreter 360 to execute methods if they are not privately protected. The interface 370 may also enable manipulation of field values and call methods of an object. Additionally, fields and methods may be dynamically added or deleted in a class or object. The techniques of

25

hash tables and the JDK Reflection API may be utilized to facilitate the foregoing processing.

One JavaScript standards specification requires five basic host objects that must
5 be present in the local library of a JavaScript interpreter. All other objects that are called
by a JavaScript program must be available in other libraries accessible to the JavaScript
interpreter. The programmer of the JavaScript source code must know what objects,
other than the five basic host objects, are accessible to the interpreter which will execute
the JavaScript source code. The Web browser in which the JavaScript program runs may
10 provide additional non-required host objects in its libraries. As one of ordinary skill in
the art will appreciate, new fields and methods may be added or deleted to any object
during run time.

As defined by a JavaScript standards specification, an object in JavaScript does
15 not necessarily only bear traces of the class to which it belongs. The JavaScript object
may have characteristics that are different from other objects belonging to the same class.
Thus, objects in JavaScript may act as independent entities with methods and fields which
may be different from the methods and fields in other objects belonging to the same class.
However, objects in the same class may have certain basic methods and fields in
20 common.

Still referring to Figure 3, during the processing of the JavaScript source code 310
in the preferred embodiment, the interpreter encounters fields and methods in the
JavaScript program. The interpreter may create Java objects in a library containing the
25 fields and the methods. However, as the input stream of JavaScript source code is
processed, the interpreter may learn more information about fields and methods which it
has previously encountered. The library interface 370 may provide the interpreter 360 the
dynamic capability to update Java objects and their related properties or attributes.

In an embodiment, the library interface 370 may have three primary Java methods through which any interaction with an object 380 is carried out. The three primary Java methods may be “get field,” “set field” and “invoke method.” These methods may be used in conjunction with JavaScript objects and classes whose methods and fields are known to the JavaScript library 380, but not known to the interpreter 360. The Reflection API may be used to access the JavaScript library 380 and thus inform the interpreter 360 about methods and fields contained in any particular object.

The JavaScript library 380 may contain a static set of predefined objects containing methods and fields. In one embodiment, all objects within the input stream of JavaScript source code 310 must exist in the JavaScript library 380. However, certain objects within the JavaScript source code 310 may contain methods and fields which are not known to the JavaScript library 380. When this occurs, the JavaScript library 380 may be dynamically updated with the new methods and fields. Similarly, the interpreter 360 may need to be aware of the new methods and fields. The dynamic update of the library 380 may be accomplished with the use of hash tables. In a preferred embodiment, the JavaScript library 380 may include a hash table for each object. Initially, the hash table for each object may be empty. When the input JavaScript program 310 introduces a new method or field, an entry may be created in the hash table corresponding to the new method or field. The name of the new method or field may be used as the key to the hash table entry. The key serves as the means by which the new method or field may be accessed to acquire information about the method or field. For methods, the information to be accessed may be the code section associated with the new method, and for fields, the information to be accessed may be the data holder or the field value. The interpreter 360 may access the hash tables to get values of the new fields and to execute the code associated with the new methods.

The newly added fields and methods in the hash tables may remain available to all JavaScript program and interpreter invocations so long as the current session of the HTML browser 220 is running. Once the HTML browser 220 is closed, the newly

updated methods and fields in the hash tables may be lost and therefore, the methods and fields may not be available to future JavaScript program and interpreter invocations in a subsequent session of the HTML browser. The clearing of the new methods and fields in the hash tables at the end of an HTML browser session may be done pursuant to a
5 JavaScript standards specification.

In the preferred embodiment the source code associated with the newly added methods is not compiled when a reference to it is stored in the hash table. Instead, an intermediate representation is stored within the engine. This technique may solve certain
10 problems encountered by the prior art. Some prior art methods compile the source code associated with the newly added methods and store the new source code in object code format for future use. The prior art technique is not efficient because it uses large amounts of memory to store the compiled object code and uses valuable processing time to convert the source code to object code. In the present invention, these problems may
15 be overcome by storing an intermediate representation of the original JavaScript syntax.

The present invention does not require that the library host objects 380 (and their associated methods) be written in Java. The objects and methods may be native code but the entry point is written in Java, in a preferred embodiment, because in the preferred
20 embodiment the interpreter 360 may require methods to have a Java entry point so that the interpreter 360 can call on such routines.

One desirable attribute of the present invention may be the independence and interchangeability of the JavaScript library 380. The preferred embodiment may include
25 one implementation of the JavaScript library 380. This implementation may be written in Java based on a JavaScript standards specification. The JavaScript library 380 may be independent of the interpreter 360. Therefore, any other implementation of the JavaScript library 380 may be easily substituted for the library used in the preferred embodiment. As mentioned previously, both the interpreter and the JavaScript library may also be
30 independent of the HTML browser. The independence and interchangeability of the

JavaScript library may permit customization of the library to different environments, such as through the addition of objects, and their corresponding methods and fields, that may be better suited to certain HTML browsers.

5 The following illustrates how the interpreter component 360 may use the library interface 370 to communicate with the JavaScript host objects library 380 to execute the intermediate representation 350, according to one embodiment:

```

10 public abstract class LibObject extends JvScObject
    {
        private static JvScBrowserContext context = null;
        public static void setContext(JvScBrowserContext ctxt) {context = ctxt;}
        public static JvScBrowserContext getContext() {return context;}
        protected JvScAtom getField(java.lang.String name) throws JavaScriptRuntimeException
15    {
        java.lang.String s = "get_" + name;
        try {m = getClass().getMethod(s, null);}
        catch(Exception e) {m = null;}
        if (m != null)
20        {
            try {return (JvScAtom) (m.invoke(this, null));}
            catch (Exception e) { // fall back}
        }
        return super.getField(name);
25    }
    protected JvScAtom setField(java.lang.String name, JvScAtom value)
        throws JavaScriptRuntimeException
    {
        java.lang.String s = "set_" + name;
30        JvScAtom[] args = new JvScAtom[1];
        args[0] = value;
        try {
            // this uses the Reflection API to find the field whose name is specified by
            // 'name'. The value of s specifies what method should be called to set the
35            // field.
            return invokeMethod(s, args, 0, 1);
        }
        catch(Exception e) { // just fall back }
        return super.setField(name, value);
40    }
    }

```



```

class JvScObject extends JvScAtom
{
    protected JvScAtom getField(String name) throws JavaScriptRuntimeException
    {
5         JvScAtom val = properties == null? null : (JvScAtom)properties.get(name);
            If(val == null)
            {
                // Reflection is being used:
                try {
10                     return (JvScAtom) this.
                        getClass( ).getField(name) .get(this) ;
                }
                catch(NoSuchFiledException e) {
...
15                 }
            }
        }
        /* How methods of JavaScript (host) objects are invoked: */
        protected JvScAtom invokeMethod(String name, JvScAtom mem[ ], int pl, int n)
20             throws JavaScriptRuntimeException
        {
            /* An attempt to access a user-defined method */
            if (properties != null)
            try {
25                 JvScFunction f =
                    /* Try to cast it to JvScFunction. If we are not caught into an
                     * exception, it's really a function. */
                    (JvScFunction)properties.get(name) ;
                    if(f != null)
30                     {
                        if(! (f instanceof JvScMethod) )
                            properties.put (name, f=new JvScMethod (this, f) );
                        return (JvScAtom) f;
                    }
            }
35         catch(Exception e) {
            System.out.println (name + " is a field, not method : "
                + properties.get (name) ) ;
        }
40         int i;
        JvScAtom[] param;
        Method method[] = null;
        If ( (method = (Method[])methods.get (this.getCalss() ) ) == null)
            methods.put(this.getClass() ,
45         for ( i = 0; i < method.length

```

```

        && (method[i].getName() . compareTo (name) != 0
        || method[i].getParameterTypes () .length != n
        || (n > 0 && method[i].getParameterTypes () [0] == varParam[0] ) ) ;
        i++);
5   if (i >= method.length)
    {
        Method m;
        /* Try to find method (JvScAtom[] varp) */
        try {
10          m = this.getClass () .getMethod (name, varParam);
        }
        catch (Exception e) (
            throw new JavaScriptRuntimeException(
                "There is no method ' " +
15              className (this.getClass () ) + " . " +
                name + "() \ accepting " + n +
                " parameter(s) . " ,
                JavaScriptRuntimeException.NO_SUCH_METHOD
            );
20          return invokeMethod(m, mem, p1, n);
        }
        try {
            if (n > 0)
            {
25                param = new JvScAtom[n];
                System.arraycopy (mem, p1, param, 0, n);
            }
            return (JvScAtom)method[i] .invoke(this, param);
        }
30    catch (Exception e) {
        if (e instanceof InvocationTargetException)
        {
            if ( ( (InvocationTargetException) e) .getTargetException ()
                instanceof JavaScriptRuntimeException)
35                throw (JavaScriptRuntimeException)
                    ( (InvocationTargetException) e) .
                        getTargetException() ;
        }
        throw new JavaScriptRuntimeException (
40            "EXCEPTION caught while trying to invoke method ' " +
                name + " ' : " +
                (e instanceof InvocationTargetException?
                ( (InvocationTargetException) e) .
                    getTargetException() . toString() : e.toString() )
45        );
    }

```

00577"64047260

```

        }
    {
        protected JvScAtom invokeMethod (Method method, JvScAtom mem[] , int p1, int n)
            throws JavaScriptRuntimeException
5    {
        Object[] p = new Object[1] ;
        JvScAtom[] param = new JvScAtom[n] ;
        System.arraycopy(mem, p1, 0, n) ;
        P[0] = param;
10    try {
        Return (JvScAtom)method.invoke(this, p) ;
        }
        catch(Exception e) {
            throw new JavaScriptRuntimeException (
15                "Exception in method " + method + ": " +
                (e instanceof InvocationTargetException?
                ( (InvocationTargetException) e ) .
                getTargetException() .toString() : e.toString() )
                );
20        }
    }
    ...
}

25    static final void initFieldsFromPrototype(JvScObject o, JvScPrototype proto) throws
    JavaScriptRuntimeException
    {
        Object key;
        for(Enumeration e = proto.properties.keys(); e.hasMoreElements(); )
30        {
            key = e.nextElement();
            o.setField(key.toString(),
                (JvScAtom)proto.properties.get(key));
        }
35    }
    public JvScAtom eval(JvScAtom code)
    {
        return null;
    }
40    public void setProperty(String name, JvScAtom value)
    {
        if (properties == null)
            properties = new Hashtable();
        properties.put(name, value);
45    }

```

00577 6404260
00577 6404260
00577 6404260

```
protected JvScAtom setField(String name, JvScAtom val)
    throws JavaScriptRuntimeException
{
    if(name.compareTo(FLD PROTOTYPE) == 0)
5        return val;
    if(properties == null || properties.get(name) == null)
    {
        /*
        * If there is no user defined field under
10        * this name, maybe there is the real field.
        */
        try {
            this.getClass().getField(name).set(this, val);
            return val;
15        }
        catch(IllegalAccessException ie) {
            /* that means the field is final or non-public.
            * In any case ignore this assignment.
            */
20            return val;
        }
        catch(Exception e) {
            if(!(e instanceof NoSuchFieldException))
25                throw new JavaScriptRuntimeException(
                    "Access error: " + this.getClass() +
                    "cannot set '" + name + "' : " + e
                );
        }
    }
30    /*
    * Access the user-defined properties table
    */
    setProperty(name, val);
    return val;
35 }
public JvScAtom getProperty(String name)
    { return properties == null? null : (JvScAtom)properties.get(name); }
private Exception savedException;

40 protected JvScAtom getField(String name) throws JavaScriptRuntimeException
    {
        JvScAtom val = properties == null? null : (JvScAtom)properties.get(name);
        if(val == null)
        {
45            try {
```

```

        return (JvScAtom)this.
            getClass () .getField(name) .get(this);
    }
    catch(NoSuchFieldException e) {
5      try {
            return new JvScNativeFunction(
                this.getClass().getName(),
                this.getClass().getMethod(name,
10                null)
            )
        }
        catch(Exception ex) { savedException = ex; }
    }
    catch(Exception ex2) { savedException = ex2; }
    throw new JavaScriptRuntimeException("Access error: " +
15        " cannot get field " +
        className(this.getClass()) +
        "." + name + "\': " + savedException );
    }
    return val;
20 }
boolean hasMethod(String name)
{
    if (properties != null)
        if(properties.get(name) != null)
25         return true;
    Method method[] = (Method[])methods.get(this.getClass());
    if (method != null)
        for( int i=0; i < method.length; i++)
            if (method [i] . getName () . compareTo (name) == 0)
30         return true;
    return false;
}
protected JvScAtom invokeMethod(String name, JvScAtom mem[], int p1, int n)
    throws JavaScriptRuntimeException
35

```

Although the forgoing description has focused on Java implementations, other similar programming languages may be used as well. Any of the foregoing embodiments may be implemented by programming a suitable general-purpose machine having appropriate hardware. The machine may comprise a single computer or computing device. Alternatively, the machine may comprise a plurality of computers or computing devices connected by a communications link.

Various embodiments may further include receiving, sending or storing instructions and/or data implemented in accordance with the foregoing description upon a carrier medium. Generally speaking, a carrier medium may include storage media or memory media such as magnetic or optical media, e.g., disk or CD-ROM, volatile or non-volatile media such as RAM (e.g. SDRAM, DDR SDRAM, RDRAM, SRAM, etc.), ROM, etc. as well as transmission media or signals such as electrical, electromagnetic, or digital signals, conveyed via a communication medium such as network and/or a wireless link.

It will be appreciated by those of ordinary skill having the benefit of this disclosure that the illustrative embodiments described above are capable of numerous variations without departing from the scope and spirit of the invention. Various modifications and changes may be made as would be obvious to a person skilled in the art having the benefit of this disclosure. It is intended that the following claims be interpreted to embrace all such modifications and changes and, accordingly, the specifications and drawings are to be regarded in an illustrative rather than a restrictive sense.

WHAT IS CLAIMED IS:

1. A method of operating a computing device, comprising:

accessing a program, said program including a sequence of instructions;

parsing said program to validate said instructions;

generating an intermediate representation of said instructions of said program;

interfacing with said program's library of host objects; and

executing said intermediate representation to produce the results intended by said program.

2. The method of claim 1, wherein said program is a JavaScript program embedded in an HTML file.

3. The method of claim 1, wherein said parsing, said generating, said interfacing and said executing are implemented using the Java programming language and said implementations are accessible from an HTML browser, and wherein said browser is programmed to pass execution control over said program to said implementations.

4. The method of claim 1, wherein said parsing is implemented using the Java programming language, wherein said parsing implementation creates Java objects, containing field names and methods based on the input stream of said program.

5. The method of claim 4, wherein said Java objects are stored in hash tables in memory.

6. An information carrier medium that, when engaged in operable relation to a computer system, is configured to communicate to the system a representation of a software program, wherein the software program comprises instructions to interpret and execute programs by:

accessing a program, said program including a sequence of instructions;

parsing said program to validate said instructions;

generating an intermediate representation of said instructions of said program;

interfacing with said program's library of host objects; and

executing said intermediate representation to produce the results intended by said program.

7. The medium of claim 6, wherein said program is a JavaScript program embedded in an HTML file.

8. The medium of claim 6, wherein said parsing, said generating, said interfacing and said executing are implemented using the Java programming language and said implementations are accessible from an HTML browser, and wherein said browser is programmed to pass execution control over said program to said implementations.

9. The medium of claim 6, wherein said parsing is implemented using the Java programming language, wherein said parsing implementation creates Java objects, containing field names and methods based on the input stream of said program.

10. The medium of claim 9, wherein said Java objects are stored in hash tables in memory.

005111 5404260

ABSTRACT OF THE DISCLOSURE

A method and apparatus for interpreting and executing a program may include accessing a program in memory, parsing the program, generating an intermediate representation equivalent of the program, and executing the intermediate representation by accessing the program's library of host objects through an interface to the library. The program may be a JavaScript program embedded in HTML documents in a browser. The Web browser is programmed to intercept the JavaScript code and pass execution control over the program to the interpreter engine developed in Java. The parsing component of the engine validates the JavaScript instructions. The validated instructions are converted by the code generator component of the engine into an intermediate representation equivalent in Java code. The interpreter engine accesses the program's library of host objects through an interface to the library and executes the intermediate representation to produce the desired results as programmed in the original JavaScript source program.



FIG. 1

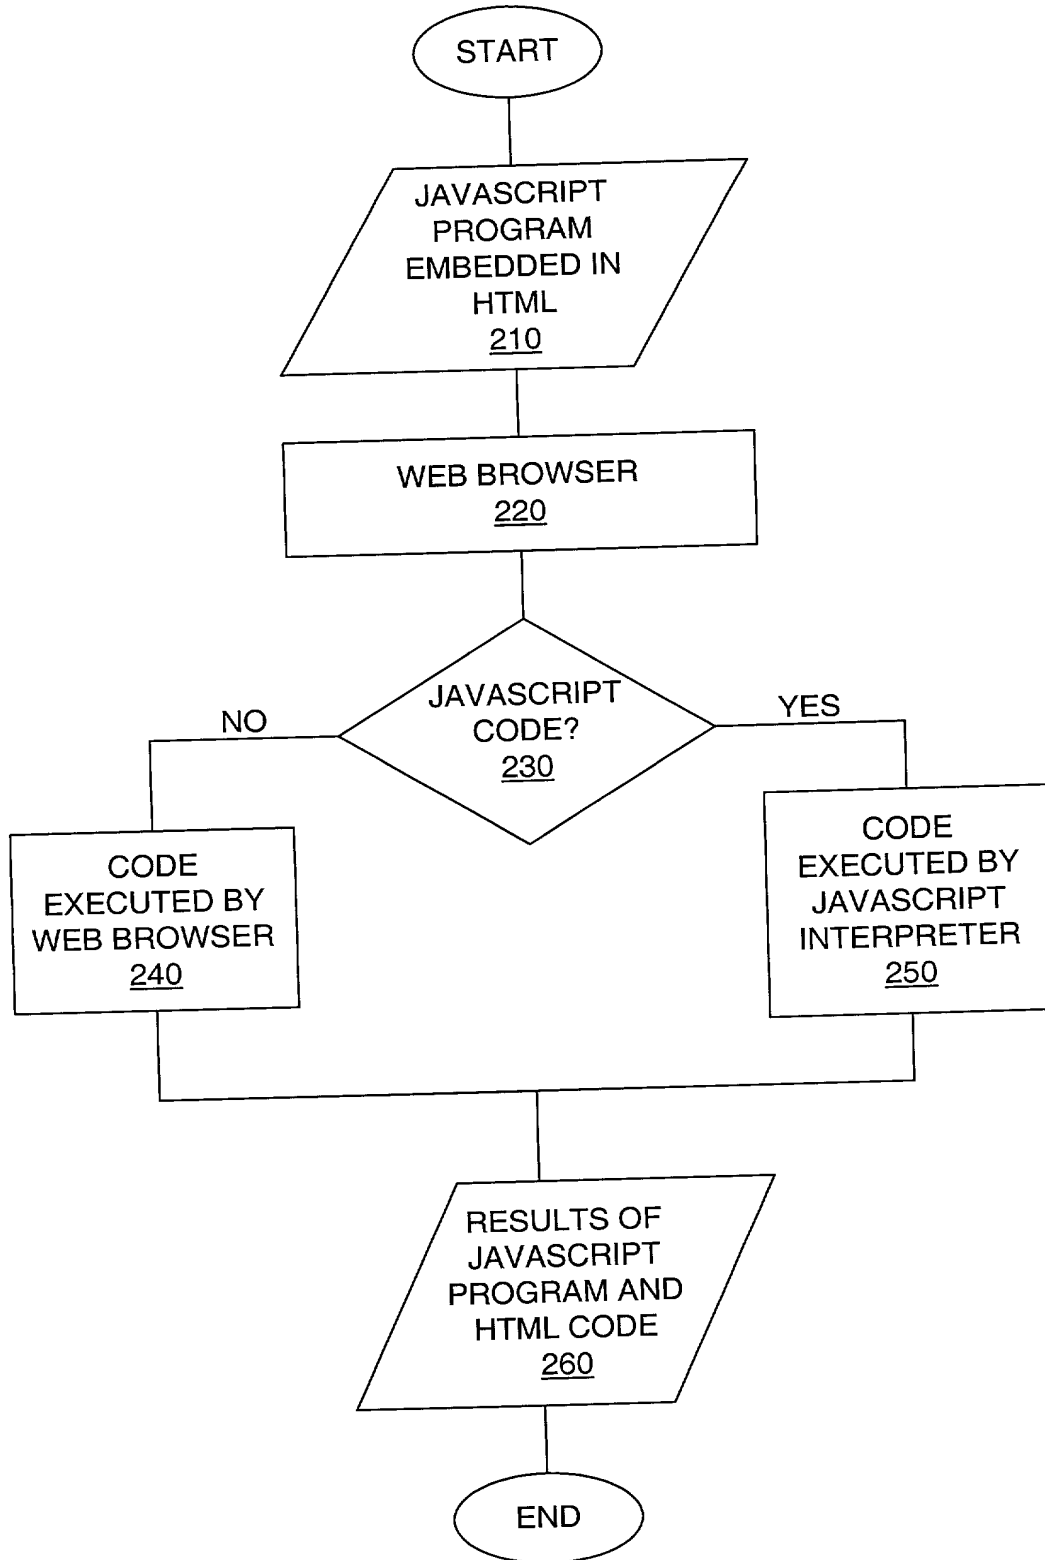


FIG. 2

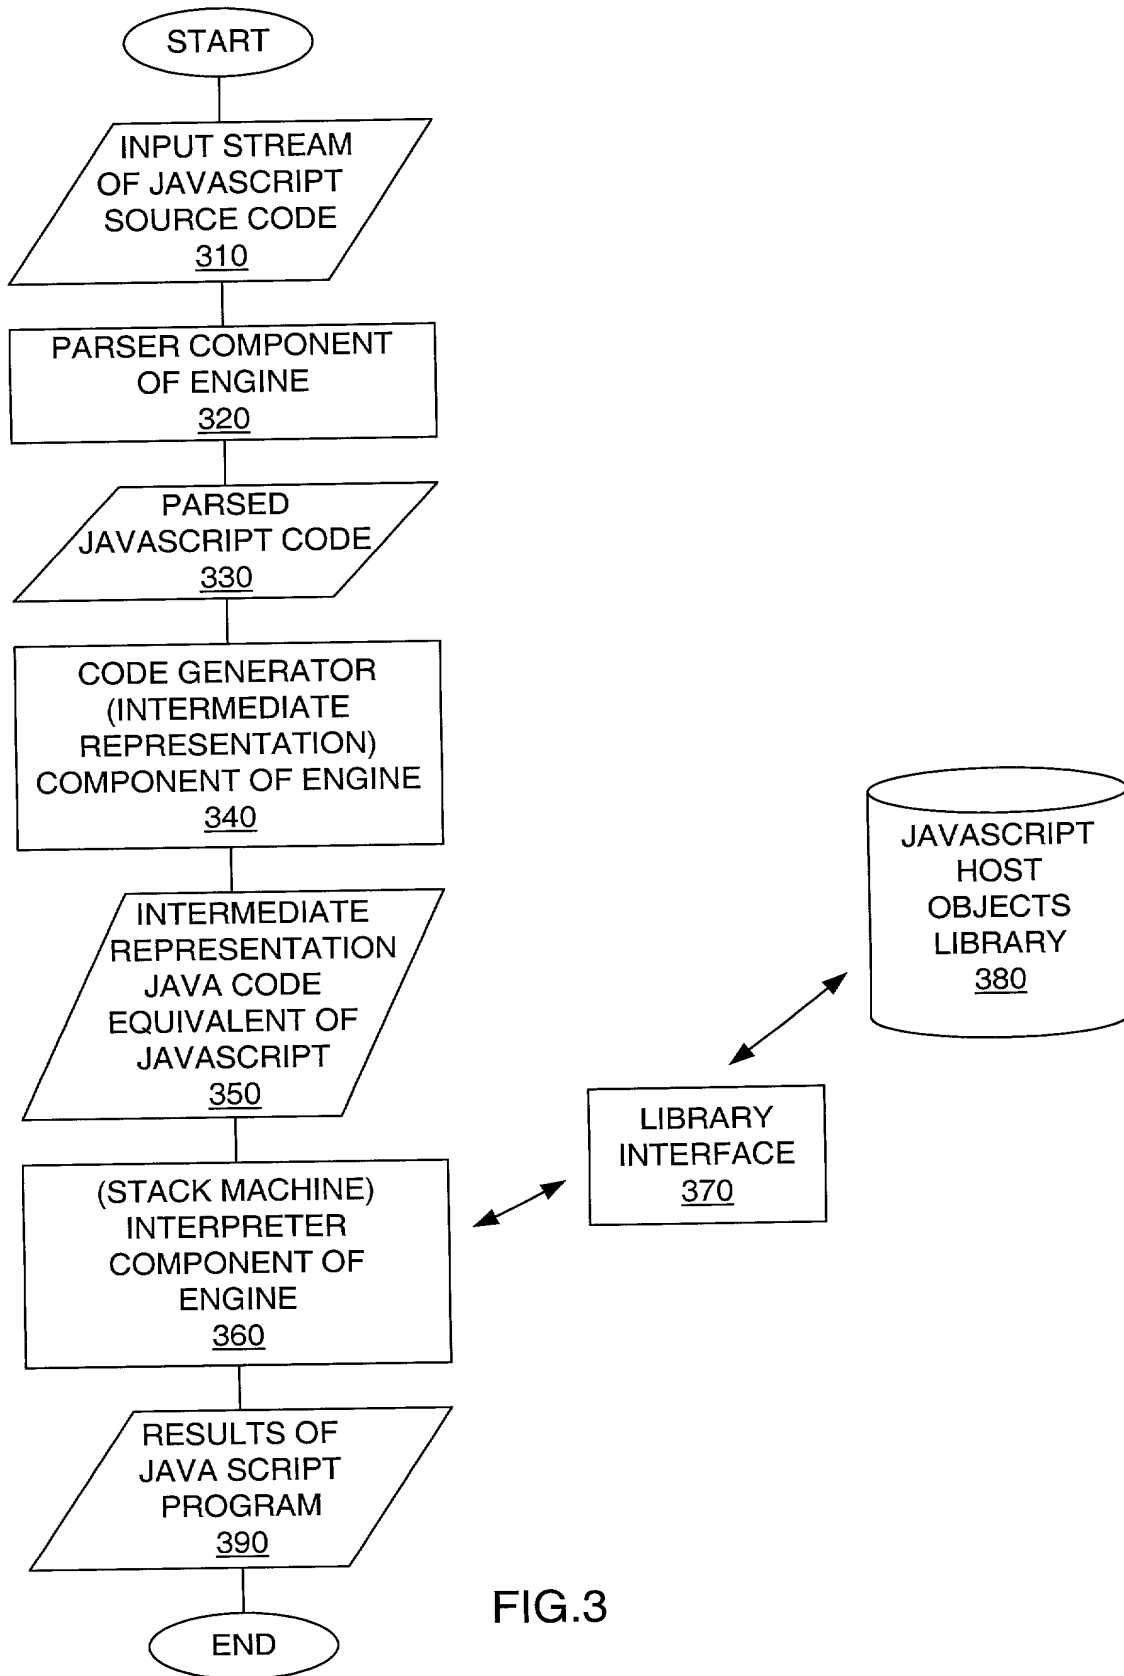


FIG.3

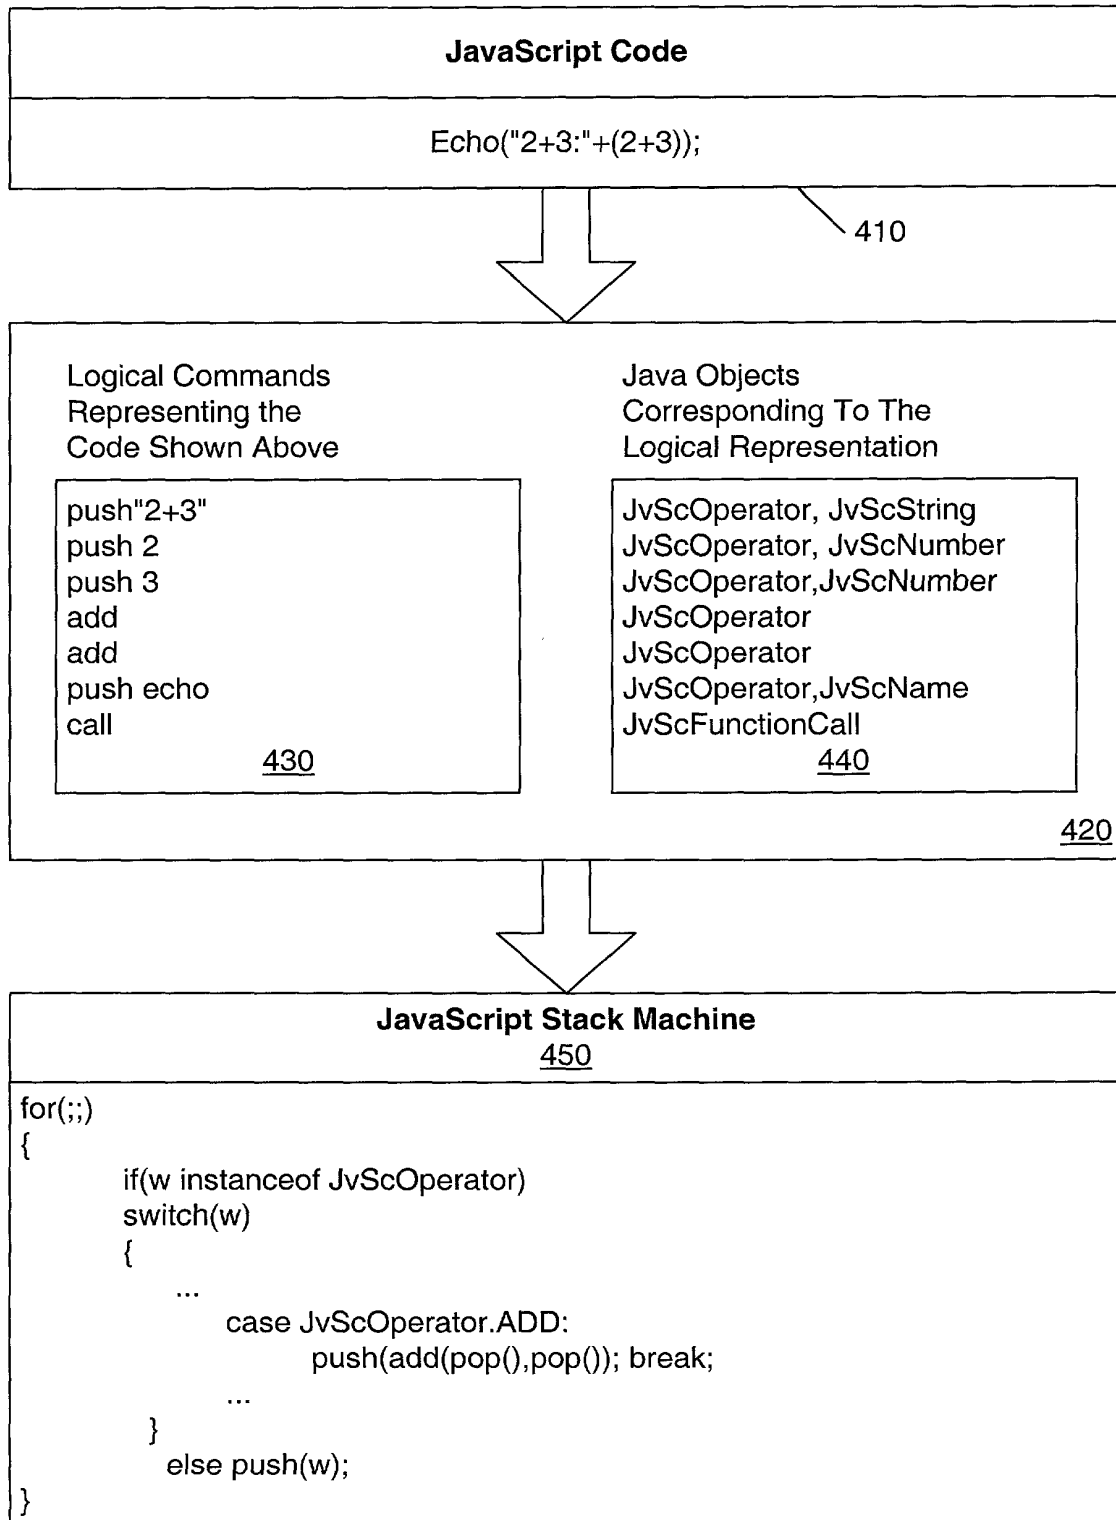


FIG.4

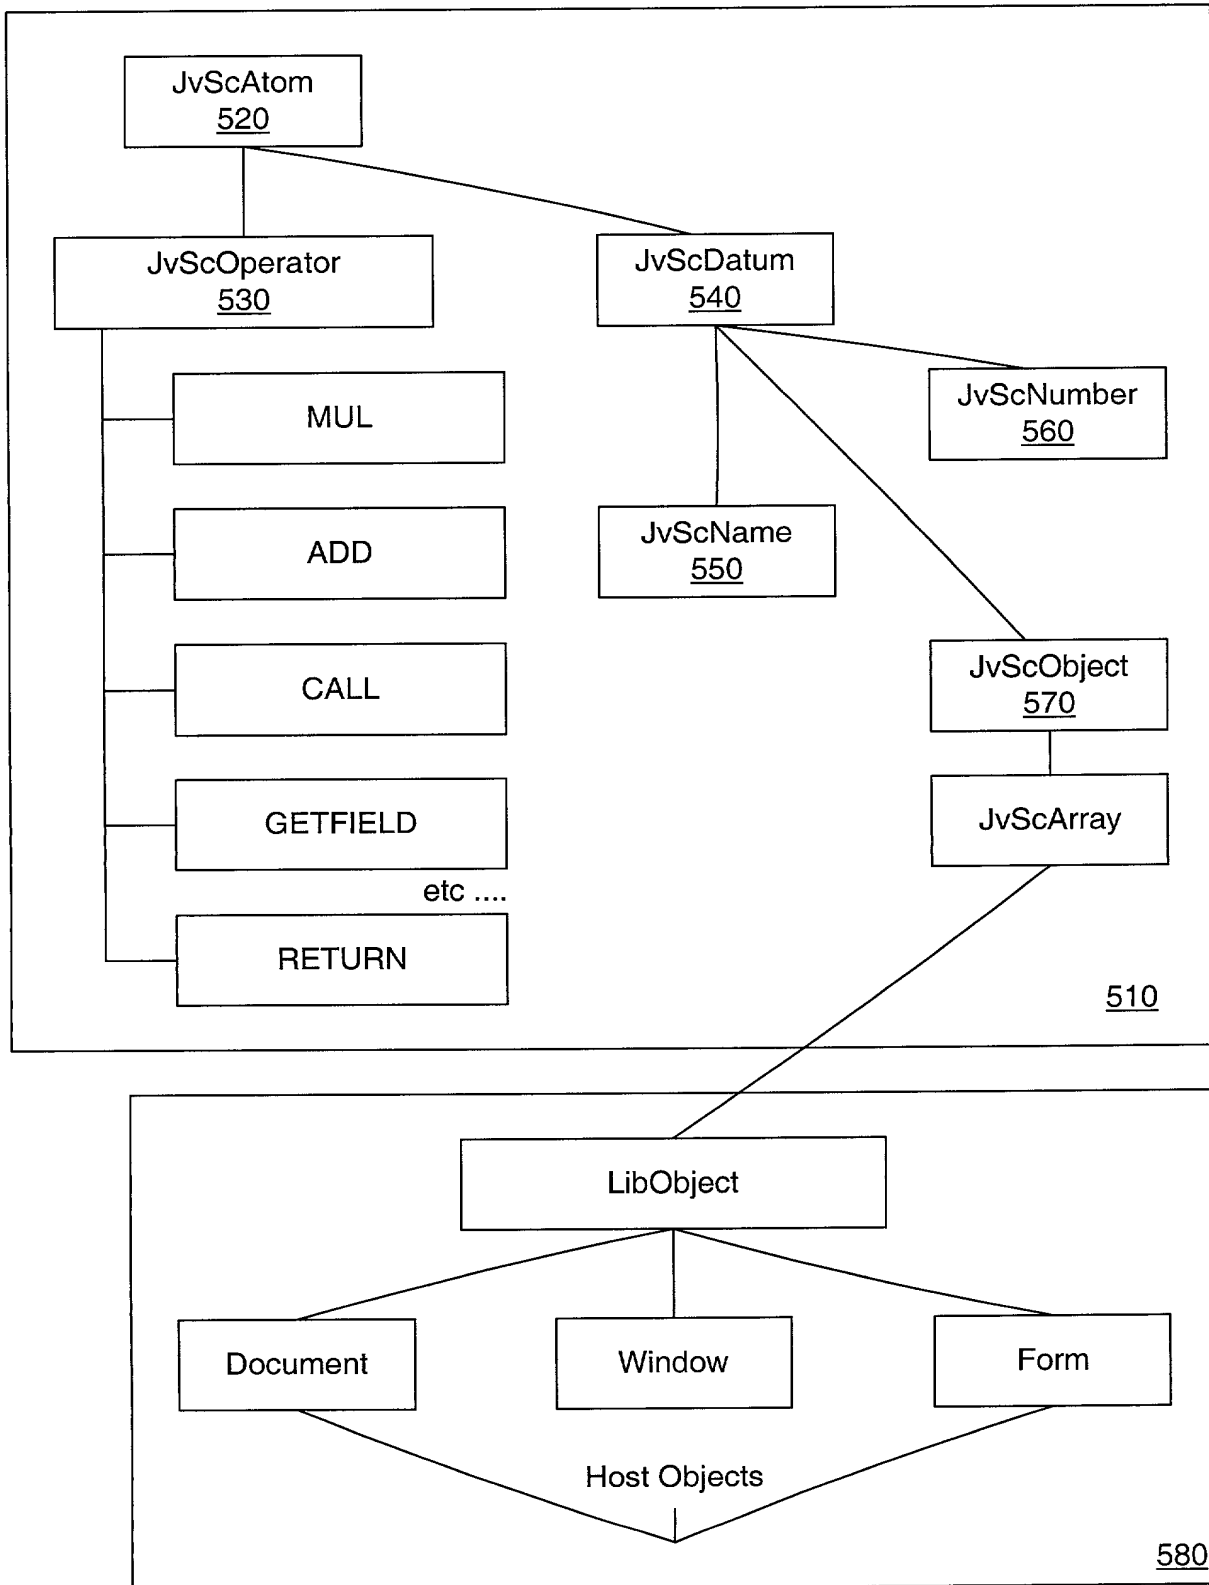


FIG. 5

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled "**JAVASCRIPT INTERPRETER ENGINE WRITTEN IN JAVA**," the specification of which:

☒ is attached hereto.
☐ was filed on _____ as Application Serial No. _____
and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the Patent and Trademark Office all information known to me to be material to patentability of the subject matter claimed in this application, as "materiality" is defined in 37 C.F.R. § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate listed below, or under § 365(a) of any PCT international application listed below designating least one country other than the United States of America, and have identified below any foreign application for patent or inventor's certificate, or of any PCT international application, having a filing date before that of the application on which priority is claimed.

<u>Prior Foreign Application No.</u>	<u>Country</u>	<u>Filing Date</u> <u>(mm/dd/yy)</u>	<u>Priority</u> <u>Claimed</u>	<u>Cert. copy</u> <u>Attached</u>
N/A				

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below.

<u>Provisional Application No.</u>	<u>Filing Date</u> <u>(mm/dd/yy)</u>
N/A	

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s) listed below, or under § 365(c) of any PCT international application listed below designating the United States of America, and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose all information known to me to be material to the patentability of the subject matter claimed in this application, as "materiality" is defined in 37 C.F.R. § 1.56, which became available between the filing date of the prior application and the national or PCT international filing date of this application.

<u>Parent Application No.</u>	<u>Filing Date</u> <u>(mm/dd/yy)</u>	<u>Parent Patent No. (if applicable) or Status</u>
N/A		

I hereby revoke any previous Powers of Attorney and appoint

Kenneth Olsen	Reg. No. 26,493
Robert S. Hauser	Reg. No. 37,847
Alexander E. Silverman	Reg. No. 37,940
Christine S. Lam	Reg. No. 37,489
Timothy J. Crean	Reg. No. 37,116
Joseph T. FitzGerald	Reg. No. 33,881
Anirma Rakshpal Gupta	Reg. No. 38,275
Sean P. Lewis	Reg. No. 42,798
Michael J. Schallop	Reg. No. 44,319
Bernice B. Chen	Reg. No. 42,403
Kenta Suzue	Reg. No. 45,145
Noreen A. Krall	Reg. No. 39,734
Richard J. Lutton, Jr.	Reg. No. 39,756
Monica D. Lee	Reg. No. 40,696
Marc D. Foodman	Reg. No. 34,110
Naren Chaganti	Reg. No. 44,602
Elaine Lee	Reg. No. 41,936
Hugh H. Matsubayashi	Reg. No. 43,779

each of said attorneys being employed by Sun Microsystems; and

Dan R. Christen	Reg. No. 39,943
Gentry E. Crook	Reg. No. 44,633
Kevin L. Daffer	Reg. No. 34,146
Mark R. DeLuca	Reg. No. 44,649
Jeffrey C. Hood	Reg. No. 35,198
Robert C. Jahnke	Reg. No. 44,800
B. Noël Kivlin	Reg. No. 33,929
Robert C. Kowert	Reg. No. 39,255
Lawrence J. Merkel	Reg. No. 41,191
Eric B. Meyertons	Reg. No. 34,876
Louise K. Miller	Reg. No. 36,609
David W. Quimby	Reg. No. 39,338
David A. Rose	Reg. No. 26,223


each of said attorneys or agents being a member or an associate of the firm of Conley, Rose & Tayon, P.C., as attorney or agent for so long as they remain with such company or firm, with full power of substitution and revocation, to prosecute the application, to make alterations and amendments therein, to transact all business in the Patent and Trademark Office in connection therewith, and to receive the Letters Patent.

Please direct all communications to:

Robert C. Kowert
Conley, Rose & Tayon, P.C.
P.O. Box 398
Austin, Texas 78767-0398
Phone: (512) 476-1400

I hereby declare that all statements made herein of my own knowledge are true and that all statements made herein on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. § 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Inventor's Full Name: Stepan B. Sokolov

Inventor's Signature:  Date: 11/13/2000

City and State (or Foreign Country) of Residence: Fremont, CA Citizenship: Ukraine

Post Office and Residence Address: 34832 Dorado Cmn., Fremont, CA 94555
(Include number, street name, city, state and zip code)